



TYPICAL SECTION
STA. 11+00.00 TO STA. 13+73.05
NOTE: SEE PROFILE SHEET FOR SUPERELEVATION TRANSITIONS.

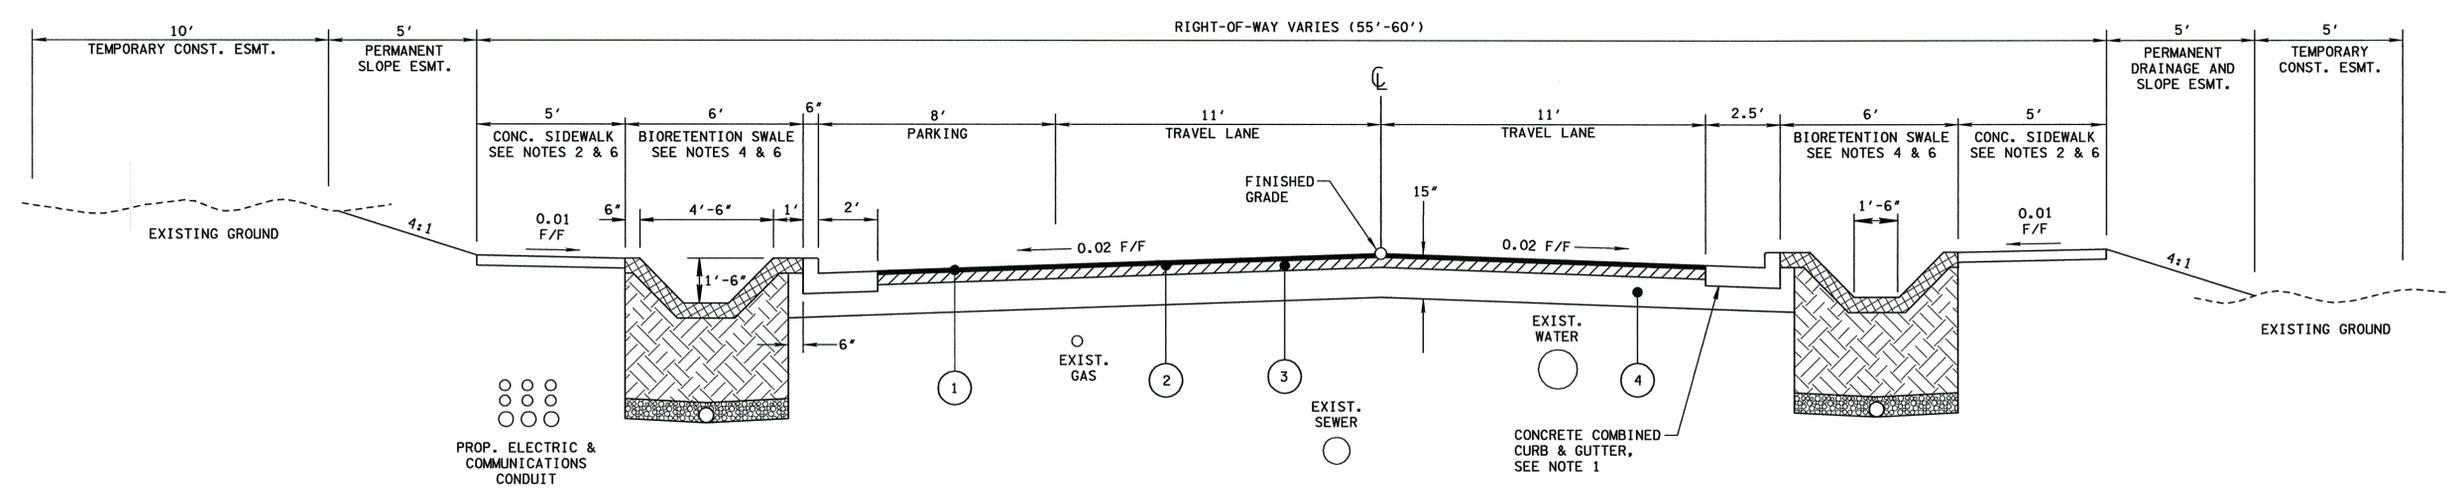

TYPICAL SECTION
STA. 13+73.05 TO STA. 21+63.10




- TYPICAL SECTION NOTES**
1. CONCRETE COMBINED CURB AND GUTTER - REFER TO DETAIL A ON SHEET R0.05.
 2. CONCRETE SIDEWALK - REFER TO C.O.K. STANDARD DETAIL COK-6.
 3. RETAINING WALL & HANDRAIL - REFER TO DETAIL D ON SHEET R0.05.
 4. BIORETENTION SWALE - REFER TO DETAIL E ON SHEET R0.05.
 5. LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE AND MAY VARY. CONTRACTOR SHALL FIELD VERIFY ACTUAL LOCATIONS.
 6. REFER TO PROPOSED LAYOUT SHEETS FOR STATION LIMITS AND TRANSITIONS.

PAVEMENT SCHEDULE	
1	SURFACE ASPHALT COURSE @ 2" THICK (APPROX. 212 LB/SY) TECHNICAL SPEC. SECTION 10.0 - ASPHALTIC CONCRETE SURFACE, GRADING "D"
2	TACK COAT TECHNICAL SPEC. SECTION 7.0 - TACK COAT (RATE 0.02 GAL/SY)
3	BINDER ASPHALT COURSE @ 3" THICK (APPROX. 339 LB/SY) TECHNICAL SPEC. SECTION 9.0 - BITUMINOUS PLANT MIX BASE, GRADING "B"
4	MINERAL AGGREGATE BASE @ 10" THICK TECHNICAL SPEC. SECTION 5.0 - MINERAL AGGREGATE BASE

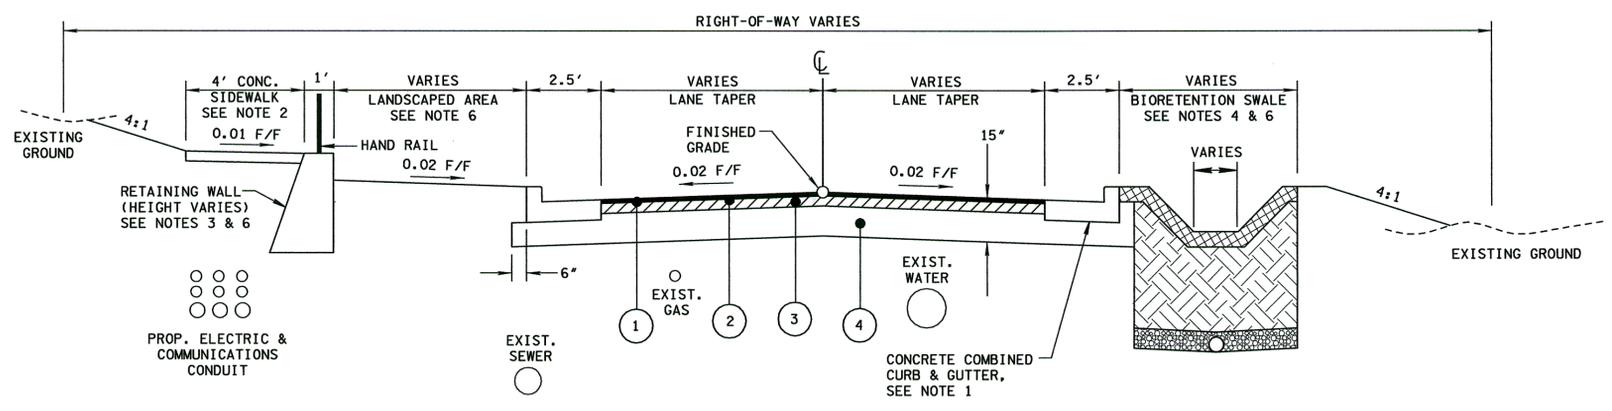



TYPICAL SECTION
STA. 21+63.10 TO STA. 22+26.00
SPECIAL NOTE: RETAINING WALL BEGINS AT STA. 21+75.00.

REVISIONS		DATE
Cannon & Cannon, Inc. Consulting Engineers • Field Surveyors 8550 Kingston Pike Knoxville, Tennessee 37919 Telephone: (865) 670-8555 • Fax: (865) 670-8866 www.cannon-cannon.com		
CLIENT: CITY OF KNOXVILLE SOUTH WATERFRONT DEVELOPMENT DEPARTMENT		
PROJECT: BLOUNT AVENUE RECONSTRUCTION PROJECT		
TYPICAL SECTIONS		
	CCI PROJECT NO.	244-0005
	DATE	06-26-09
	P.I.C.	WHC
	DRAWN	TRANSPORTATION
	Q.C.	JCE
R0.03		

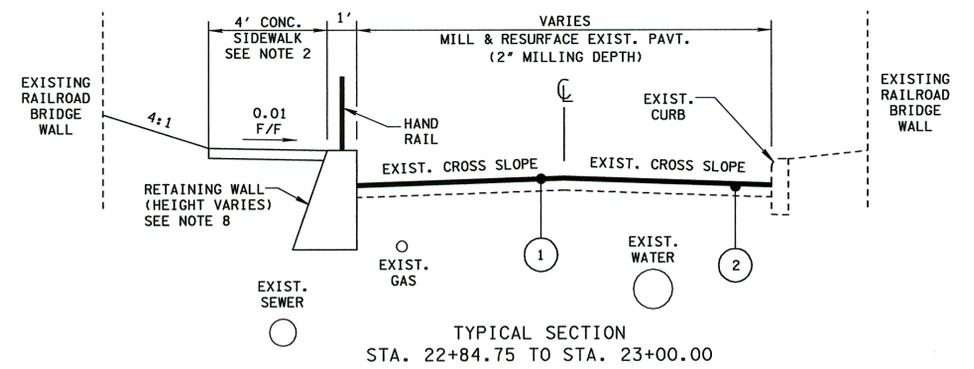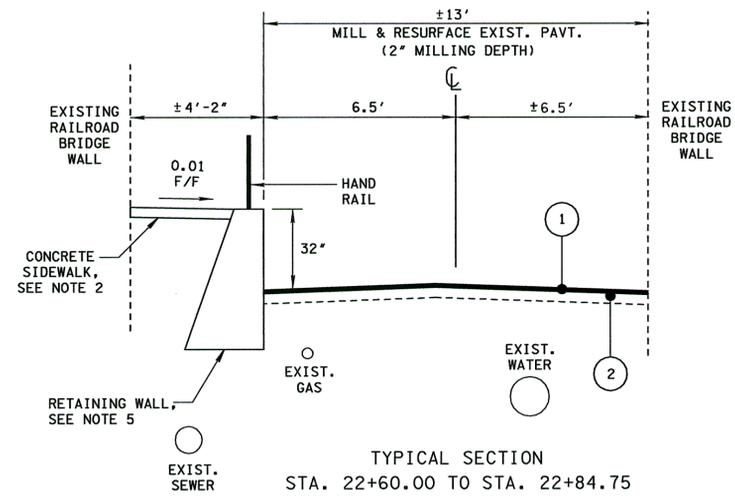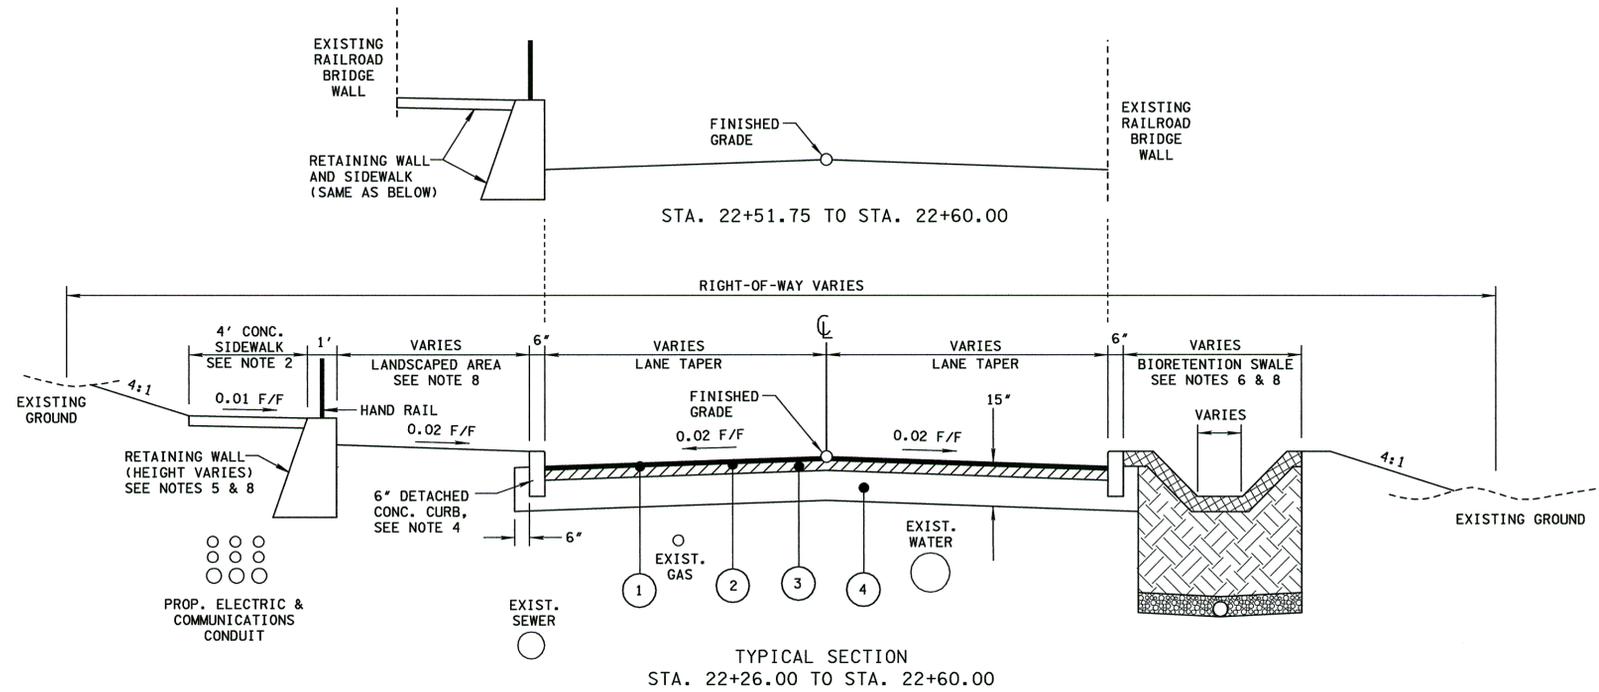

TYPICAL SECTION NOTES

1. CONCRETE COMBINED CURB AND GUTTER - REFER TO DETAIL A ON SHEET RO.05.
2. CONCRETE SIDEWALK - REFER TO C.O.K. STANDARD DETAIL COK-6.
3. CONCRETE SIDEWALK WITH INTEGRAL CURB - REFER TO C.O.K. STANDARD DETAIL COK-6.
4. 6" DETACHED CONCRETE CURB - REFER TO DETAIL A-1 ON SHEET RO.05.
5. RETAINING WALL & HANDRAIL - REFER TO DETAIL D ON SHEET RO.05.
6. BIORETENTION SWALE - REFER TO DETAIL E ON SHEET RO.05.
7. LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE AND MAY VARY. CONTRACTOR SHALL FIELD VERIFY ACTUAL LOCATIONS.
8. REFER TO PROPOSED LAYOUT SHEETS FOR STATION LIMITS AND TRANSITIONS.

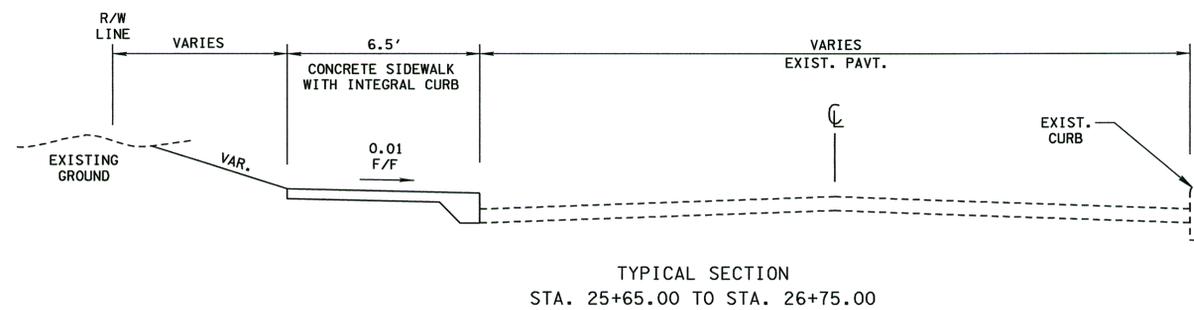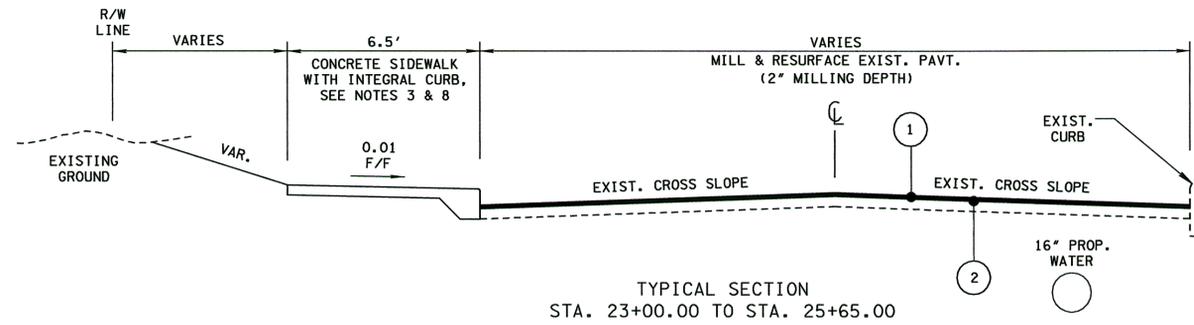

PAVEMENT SCHEDULE	
1	SURFACE ASPHALT COURSE @ 2" THICK (APPROX. 212 LB/SY) TECHNICAL SPEC. SECTION 10.0 - ASPHALTIC CONCRETE SURFACE, GRADING "D"
2	TACK COAT TECHNICAL SPEC. SECTION 7.0 - TACK COAT (RATE 0.02 GAL/SY)
3	BINDER ASPHALT COURSE @ 3" THICK (APPROX. 339 LB/SY) TECHNICAL SPEC. SECTION 9.0 - BITUMINOUS PLANT MIX BASE, GRADING "B"
4	MINERAL AGGREGATE BASE @ 10" THICK TECHNICAL SPEC. SECTION 5.0 - MINERAL AGGREGATE BASE

REVISIONS	DATE
Cannon & Cannon, Inc. Consulting Engineers • Field Surveyors 8550 Kingston Pike Knoxville, Tennessee 37919 Telephone: (865) 670-8555 • Fax: (865) 670-8866 www.cannon-cannon.com	
CLIENT:	CITY OF KNOXVILLE SOUTH WATERFRONT DEVELOPMENT DEPARTMENT
PROJECT:	BLOUNT AVENUE RECONSTRUCTION PROJECT
TYPICAL SECTIONS	
CGI PROJECT NO.	244-0005
DATE	06-26-09
P.I.C.	WHC
DRAWN	TRANSPORTATION
Q.C.	JCE
R0.04	