

ACTIVITY: Root Pruning

TP - 03



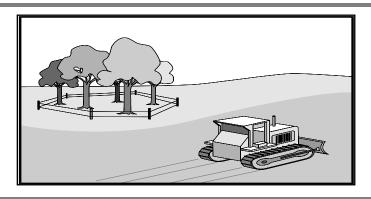

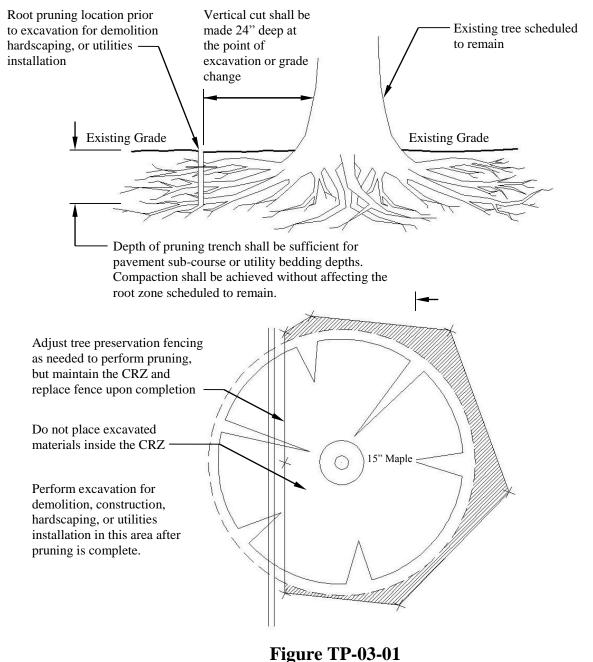

Root Pruning

ACTIVITY: Root Pruning $TP-03$

Root Pruning Notes:

- 1. Vertical cut shall be made at the limit of grading or excavation.
- 2. Contractor shall use a rock saw, vibratory plow, cable puller, or similar mechanical device, or a sharpened shovel or spade and hand pruners if done manually.
- 3. Contractor shall have the blade sharpened on mechanical root pruners prior to the start of the project.
- 4. Contractor shall, upon completion of the cut, immediately backfill the cut with soil, avoiding any voids. Construction fencing shall be installed no closer to the trunk of the tree than the location where the root pruning took place.
- 5. All root pruning within the CRZ must be approved by the Urban Forester or Designer.